


Edinburgh

ISIZE SUPERRIDE BOOSTER

INSTRUCTION

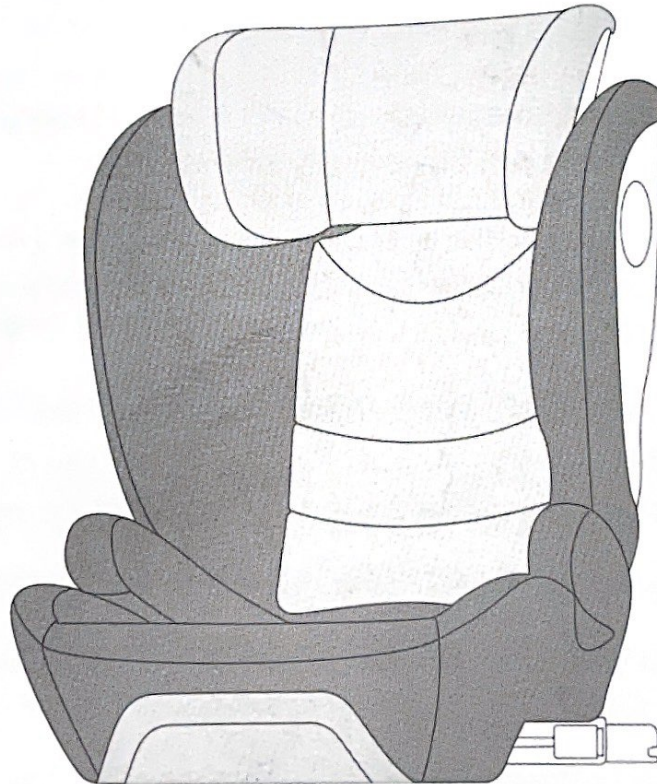

CHILD CAR SEAT

Height: 100-150cm Weight: 15-36 KG

01

SAFETY WARNING

- This product can also be forward-facing used for children with a height of 100-150cm (Weight: 15-36kg, about 3-12 years old), using adult three-point belt to fix the child restraint system, or using ISOFIX and adult three-point belt together to fix the child restraint system.
- Do not use any load bearing contact points other than those described in the instructions and marked in the child restraint when in 100-150cm. Please keep for future reference.
- Do not use this child booster seat at home. It has not been designed for home use and should only be used in your car.
- For the reason of safety, the child booster seat must be fixed inside the vehicle using ISOFIX anchorages even if you do not put your child inside the child booster seat.
- The rigid items and plastic parts of a child booster seat shall be so located and installed that they are not liable, during everyday use of the vehicle to become trapped by a moveable seat or in a door of the vehicle.
- Any straps holding the restraint to the vehicle should be tight ;
- Any straps restraining the child should be adjusted to the child's body ;
Straps should not be twisted ;
- Ensure that any lap strap is worn low down, so that the pelvis is firmly engaged, shall be stressed ;

- The booster seat should be replaced when it has been subject to violent stresses in an accident ;
- It's dangerous to make any alterations or additions to the booster seat also dangerous not to follow closely the installation instructions provided by the manufacturer ;
- When the booster seat is not provided with a textile cover, the booster seat should be kept away from sunlight, otherwise it may be too hot for the child's skin ;
- Don't leave your child in the booster seat unattended.
- Any luggage or other object liable to cause injuries in the event of a collision shall be properly secured ;
- The booster seat shall not be used without the cover ;
- The booster seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance ;
- The instructions shall be retained on the booster seat for its life period or in the vehicle handbook in the case of built-in restraints ;
- The user shall also be referred to the vehicle manufacturer's handbook ;
- Never use a second-hand product, as you can never be certain what was happened to it.


i-Size booster seats (100-150cm) Notice

- This is a i-Size booster seat Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use primarily in "i-Size seating position" as indicated by vehicle manufacturers in the vehicle user's manual.
- If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.




03

PRODUCT OVERVIEW

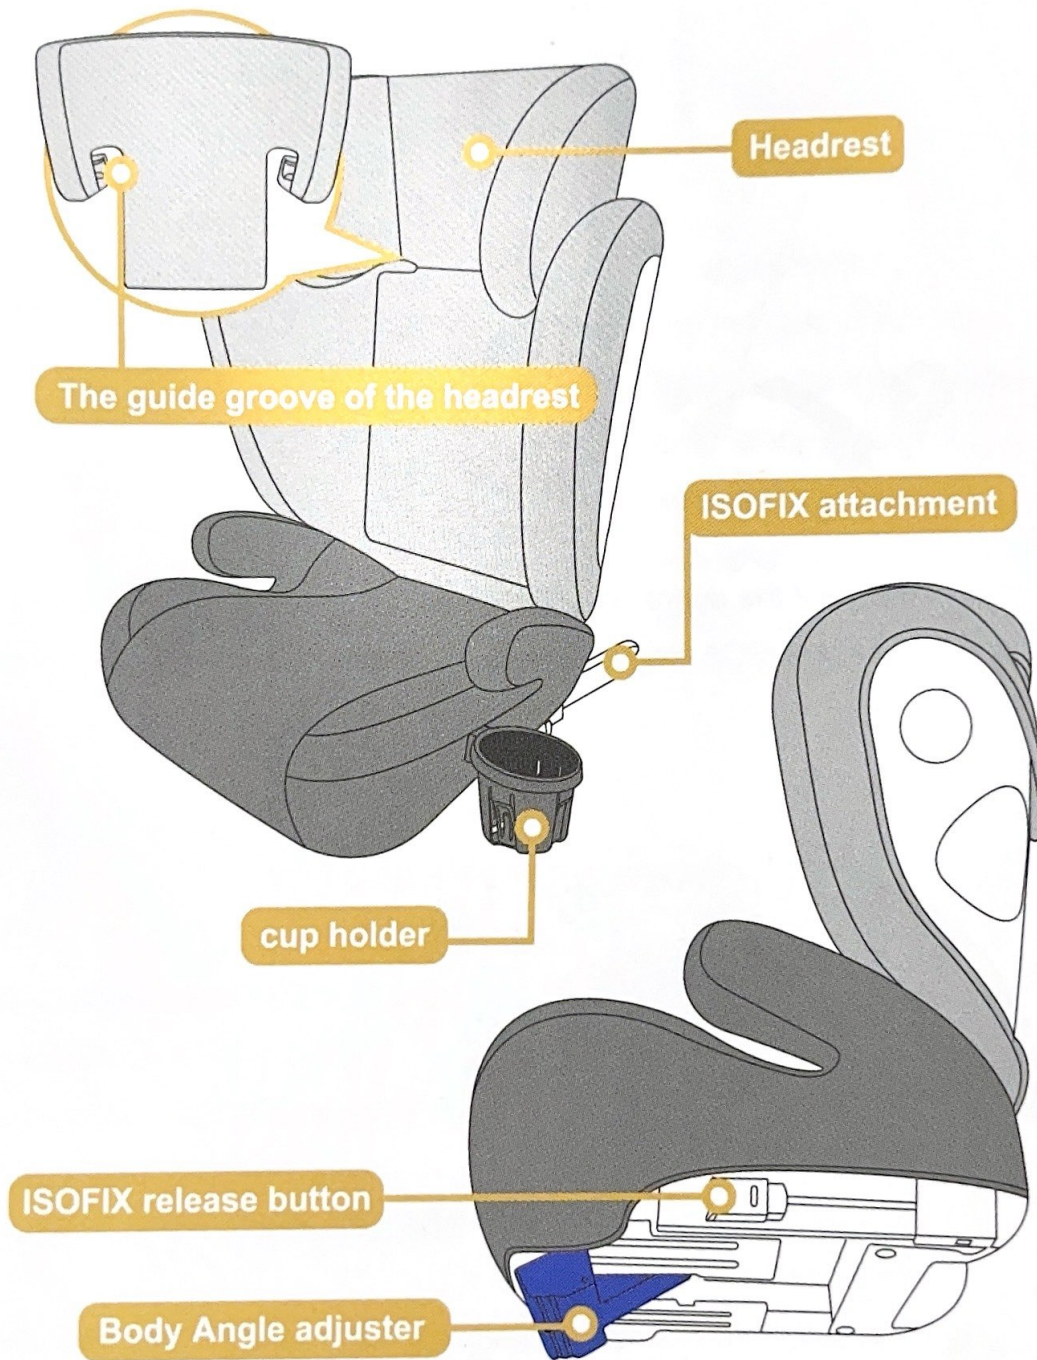

04


Install position of the child seat in vehicle

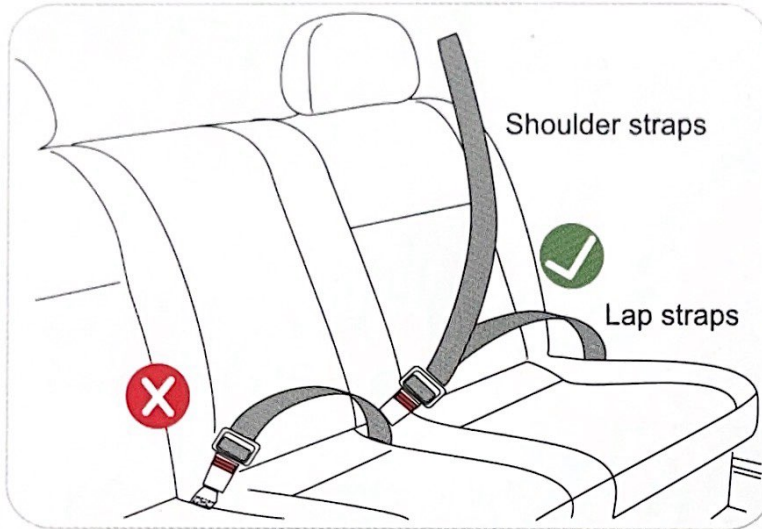

✓ Correct operation

✗ Faulty operation

- Only suitable if the approved vehicles are fitted with 3 point safety-belt, approved to UN/ECE Regulation No.16 or other equivalent standards.

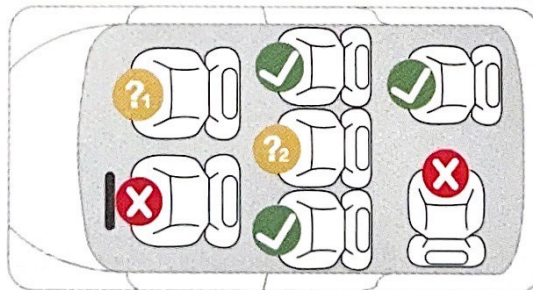

?₁ Not to use in seating positions where an active frontal airbag is installed.

?₂ The child restraint system can only be installed in this position with an ISOFIX anchorage or an adult three-point seat belt.

05

05.1 Headrest adjustment 05.2 Seat angle adjustment




Headrest adjustment:

Press and hold the blue button on the backrest, and pull the groove on the back of the headrest.

The headrest has 8 gears which can be adjusted depending on the child's height.

Seat angle adjustment:


Lift the bottom end of the seat and adjust the shifter to the front. If you want to retract it, just move it in the opposite direction.

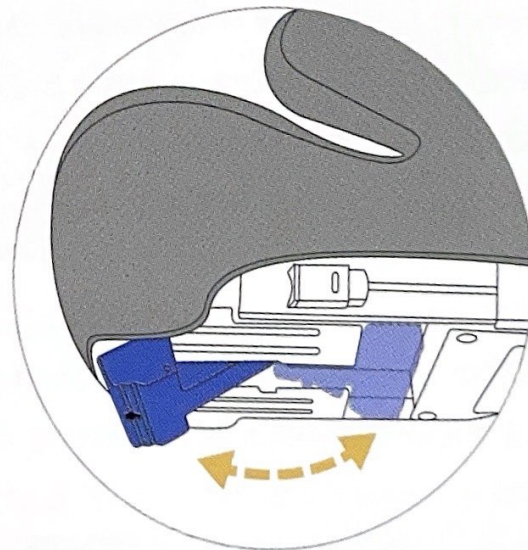

06



Adjust the ISOFIX attachments

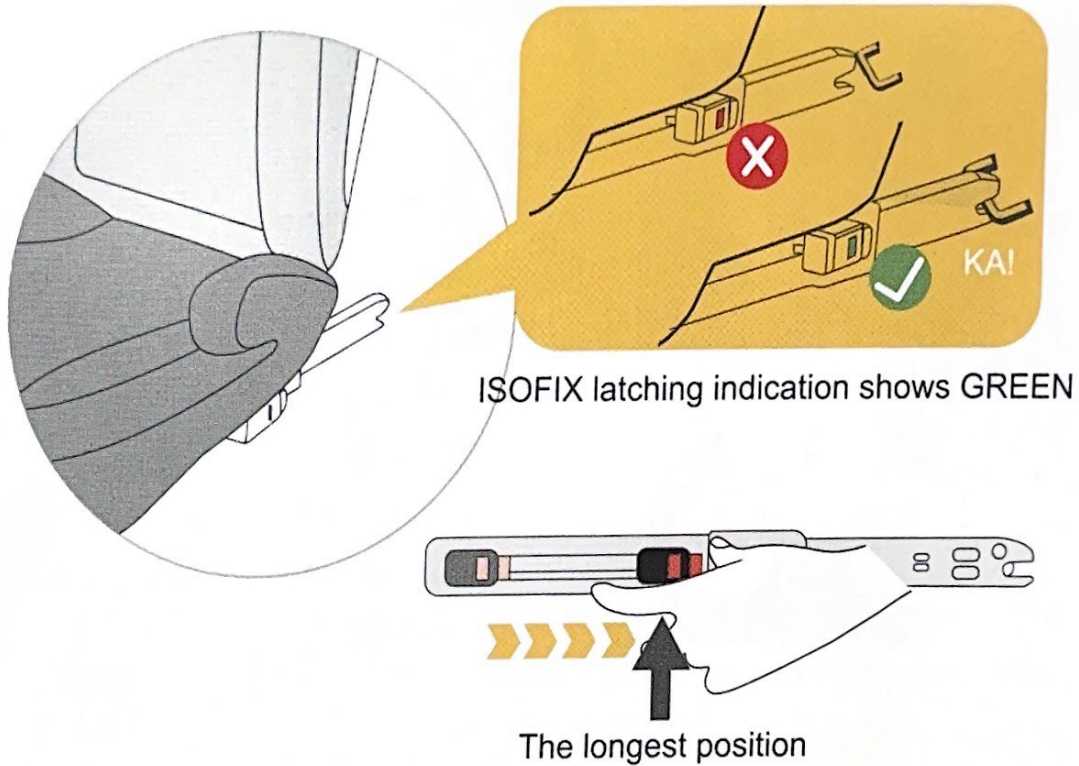

The ISOFIX attachments can be adjusted for many positions to fit the different positions of ISOFIX low anchorages extending from car seat. Press down the release button to adjust ISOFIX attachment of both sides to the longest. Then put the ISOFIX attachments into guide sleeves, and insert them into ISOFIX anchorages. Make sure that you have heard a "click" and the ISOFIX latching indication shows GREEN. If you want to release the ISOFIX attachments, just installation of the ISOFIX attachments is finished. Push the release button of the ISOFIX chuck at the direction as shown, the ISOFIX chuck will be released. After installed the ISOFIX chuck, push the child restraint forwards until it is tight against the car seat. Now, the ISOFIX base is installed in place.

07

Backrest and base installation steps / removal steps

Backrest and base removal steps:

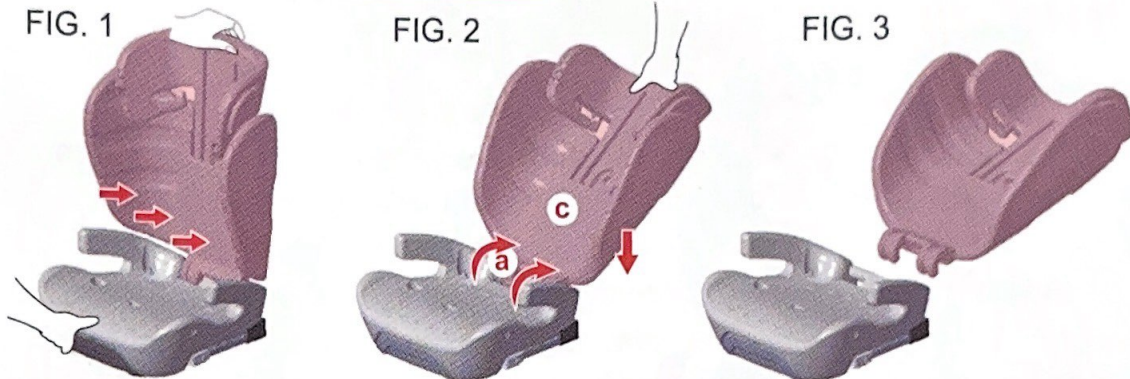


FIG. 1: Fix the base with one hand and push the backrest back with the other;

FIG. 2: Press and hold the backrest rotation axis (a), and rotate the backrest (c) to the lying angle;

FIG. 3: The backrest and base are easily removable.

Backrest and base installation steps:



FIG. 1: Align the backrest rotation axis (a) with the hole in (b), and install it downward;

FIG. 2: Fix the base with one hand, and rotate the (c) backrest with the other hand into the hole;

FIG.3: Hear two beeps of "KA" "KA", as shown in Figure 3, the installation is successful.

08



INSTALLATION With backrest

 shoulder straps  lap straps




Method 1 ISOFIX+3-POINT BELT

Place the safety seat on the car seat, and at the same time ISOFIX locks the car ISOFIX interface (see 06), when you hear "KA", the release button is green, Make sure close to the car seat; Then place the child on the safety seat, insert the car seat belt across the child's body into the car groove of the car seat; Make sure that the car seat shoulder belt passes through the guide groove of the headrest, and pull up the car seat lap belt to check whether it is locked.

Method 2 3-POINT BELT

Place the safety seat on the car seat, close to the car seat; Then place the child on the safety seat, insert the car seat belt across the child's body into the car groove of the car seat; Make sure that the car seat shoulder belt passes through the guide groove of the headrest, and pull up the car seat lap belt to check whether it is locked.

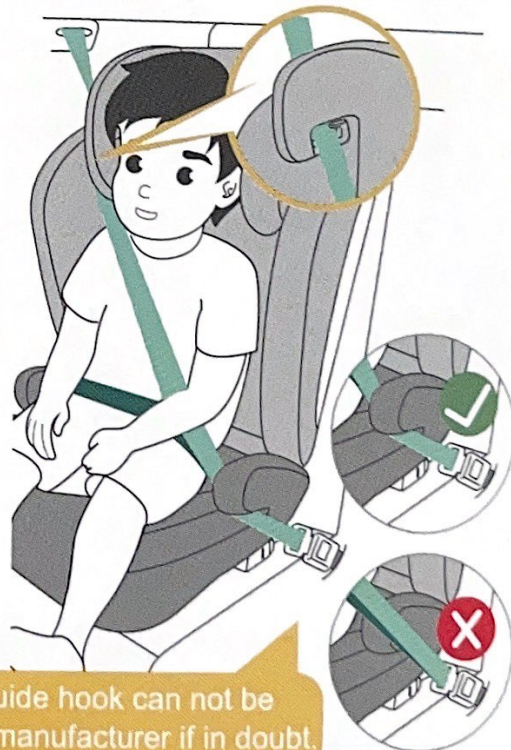

After belt fixed, the seat buckle and belt guide hook can not be placed in this position. Please contact the manufacturer if in doubt.

09



INSTALLATION Without backrest

■ shoulder straps ■ lap straps

Method 1 ISOFIX+3-POINT BELT



Place the safety seat on the car seat, and at the same time ISOFIX locks the car ISOFIX interface, when you hear "Click", the release button is green, Make sure close to the car seat;

Then place the child on the safety seat, and insert the car seat belt through the Seat belt lock around the child's body into the car safety card slot according to the installation path shown in the figure.

Method 2 3-POINT BELT



Place the safety seat on the car seat, close to the car seat;
Then place the child on the safety seat, and insert the car seat belt through the Seat belt lock around the child's body into the car safety card slot according to the installation path shown in the figure.



Seat belt lock is Optional according to customer needs, It can be used or not used.

10

Maintenance and cleaning

Daily maintenance

- In daily use, check periodically the child booster seat. The child booster seat should be replaced after an accident.
- Please keep this child booster seat in dry and ventilated place to avoid damp moldy.
- If the child booster seat becomes dusty, clean the seat belt and the plastic pieces by swiping them with a damp sponge and let it dry under ambiance.
- If food or drink drop accidentally on the buckle, disassemble the seat belt from the child booster seat and rinse it gently by warm water. Leave it dry under ambiance.
- For cleaning the entire child booster seat fabric cover, please refer to the washing instruction.

Washing instruction

- Never use any solvent, chemical detergent or lubricant on any part of your child booster seat .



Hand wash, water
temperature
below 30°C



Do not bleach



Dryclean, any
solvent except
trichloroethylene.



Do not tumble dry



Do not iron



Supplied by
Baby Factory NZ Ltd
www.babyfactory.co.nz
